

# OG6 200L/Min Oval Gear Meter

## Technical Product data sheet



### OG6 200L/Min Oval Gear Meter

The rugged OG6 oval gear flowmeter is designed to give high performance with a low cost of ownership. It has a standard flow range from 2.0 to 200 L/Min on 30 Cstk oil and 10 to 200 L/min on water like liquids. The standard inlet and outlet are 1½" female threads. For OEM use alternatives, including manifold mountings, are available. The standard model is 316 St St with Viton™ 'O' ring seal.

#### Features


- Excellent chemical resistance
- Rugged construction
- Individual calibration
- High viscosity capability
- Low pressure loss
- No flow conditioning required
- Hall, reed switch or Namur sensor
- Accuracy 1.0 % reading water  
0.5 % reading oil
- ±0.25% reading \*
- 0.1% repeatability
- IP67/NEMA 4 protection
- Models to 400 Bar

\* When used with our metra-smart instrument

#### Ideal for

- ◆ Engine test
- ◆ Oil flow
- ◆ High viscosity fluids
- ◆ OEM equipment

At the heart of the meter are a pair of toothed oval gears one of which contains chemically resistant magnets, the gears rotate freely on robust bearings. Rotation is detected through the chamber wall by a Hall Effect detector or a reed switch giving approximately 21 pulses per litre passed. The output is an NPN pulse or a voltage free contact closure either of which is readily interfaced with most electronic display or recording devices. This combination of materials and technology ensures a long life product with reliable, accurate operation throughout.

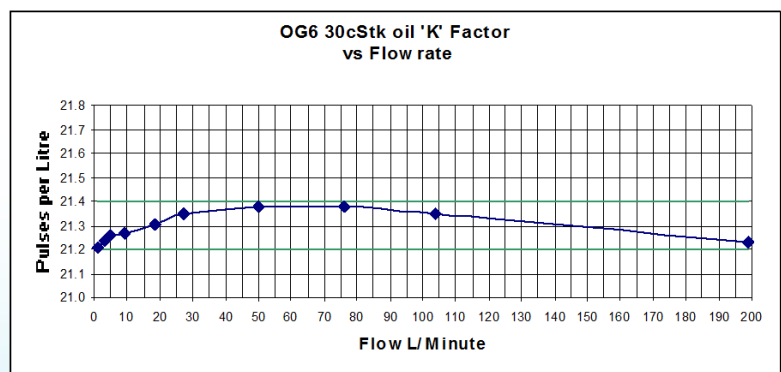

TITAN ENTERPRISES LTD.

Coldharbour Business Park, Sherborne, Dorset DT9 4JW

Phone (44) 01935 812790 Fax (44) 01935 812890 Web [www.flowmeters.co.uk](http://www.flowmeters.co.uk) [sales@flowmeters.co.uk](mailto:sales@flowmeters.co.uk)

## OG6 200L/Min Oval Gear Meter


### Order Codes

Model	<b>OG6</b>
Body mat'l	<p><b>S</b> - 316 St St 50 bar std A - Aluminium 10bar max</p>
Temp rating	<p><b>S</b> = 80°C / 158°F T = 100°C / 212°F U = 150°C / 300°F</p>
Pressure Rating	<p><b>5</b> - 50 Bar 750 PSI (St St) 1 - 10 Bar 150 PSI (Al) 4 - 400 Bar 5880 PSI (St St)</p>
Seal material	<p><b>V</b> - Viton™ N - Nitrile E - EPDM K - Kalrez</p>
Detector type	<p><b>H</b> - Hall Effect R - Reed switch N - Namur</p>
Pipe thread	<b>P</b> - 1½" (OG6 std)
Connections	<p><b>B</b> - BSP F N - NPT F F - Flanged (specify)</p>


e.g. A stainless steel meter rated at 80°C, 50 Bar, with Viton™ seal, Hall effect detector and a 1½" BSP thread would have the order code:- **OG6-SS5-VHP-B**

Sample product codes →	Stainless standard OG6-SS5-VHP-B	Aluminium standard OG6-AS1-VHP-B
Flow range	- Water - 30 cSt Oil	10 - 200.0 LPM 2.0 - 200.0 LPM
Wetted mats	- Body - Gears - Seal - Magnet	316 St St Carbon filled PEEK™ Viton™ Ceramic
Accuracy	- Water - 30 cSt oil	Aluminium Carbon filled PEEK™ Viton™ Ceramic
Repeatability	± 1.0 % Reading ± 0.5% Reading	± 1.0 % Reading ± 0.5% Reading
Detector Type	± 0.1%	± 0.1%
Terminations	Hall effect	Hall effect
Approx 'K' factor - Pulses/Litre	Terminal Block P69 cable gland	Terminal Block P69 cable gland
	21	21



Weight in kg		
St St	- 50 Bar	8.000
Aluminium	- 10 Bar	6.000
St St	- 400 Bar	12.000

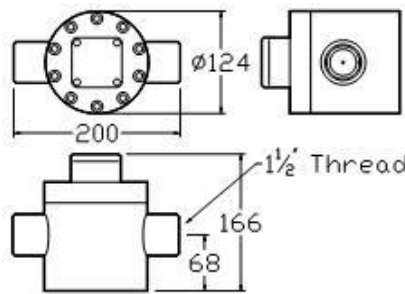

316 St St body

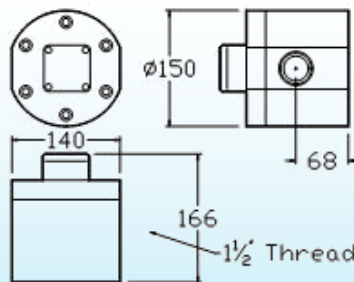

Aluminium body

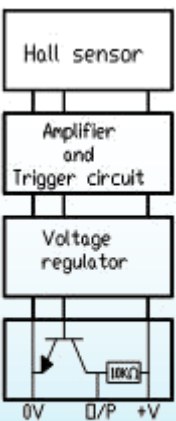

Sensor block diagram