

Fletcher Machine Inc.

4305 E. US Hwy. 64
Lexington, NC 27292

Phone # : (336) 249-6101

Watts # : (800) 438-1054


Fax # : (336) 249-6890

www.FLETCHER-MACHINE.com

FM-2000

CONTOUR BANDER

- Control panel is located overhead for ease accessibility.
- Strip veneer or plastic, coil rolls of PVC, melamine or solid wood strip.
- Non-marring phenolic top mounted on steel frame.
- Glue-pot is of overhead construction for gravity feeding of hot melt glue.
- Flow of glue from applicator controlled by adjustable regulating gates.
- Glue-pot has two heat zones for maximum pot life of glue.
- Glue-pot temperature controls with programmable set point so applicator does not run until unit reaches operating temperature.
- table can tilt to a maximum 15 degrees. very accurate control of band length to allow butt joints on round tables.
- Drive roller diameter 1-3/4 covered with silicone.
- Foot pedal controls for advancement of band and emergency stop. 3mm banding option.

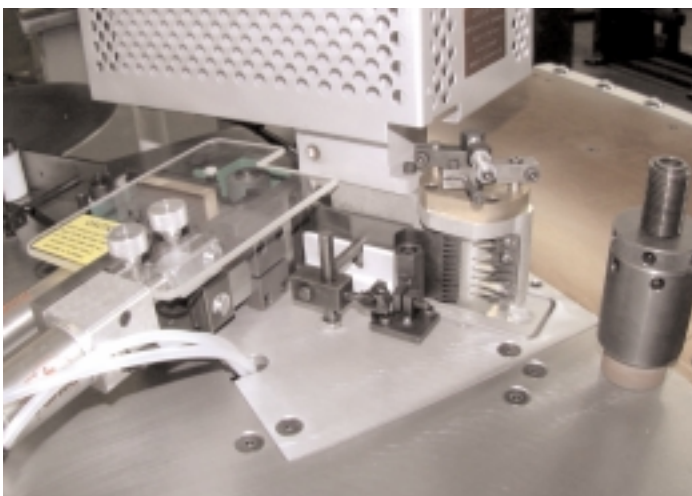

Band Feed & Glue-pot



Glue Applicator & Pressure Roller